





## Certification / Sertifikasyon

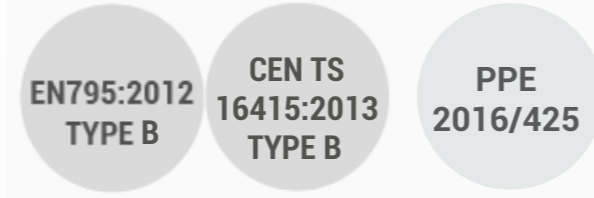

## Max. Number of User / Maksimum Kullanıcı Sayısı



- \* **Material /Malzeme:** Stainless Steel / Paslanmaz Çelik
- \* **Max. User / Maks. Kullanıcı:** 2 persons / 2 kişi
- \* **Direction / Kullanım Yolu:** All Direction / Yer Yön
- \* **Lenght / Uzunluk:** 50 cm to 200 cm / 50 cm'den 200 cm'e
- \* **Standard / Standart:** EN795:2012 TYPE B CEN/TS 16415:2013 TYPE B, the EU examination was performed by ALIENOR certification NB 2754, Modul C2 was performed by QUINTIN CERTIFICATION NB 2927.

**(EN)** OD-S6 steel anchor sling is designed to create a safe connection point in all types of profiles. It is made of 316L quality pvc coated stainless steel material with a diameter of Ø6mm with its innovative technological production.

**(TR)** OD-S6 çelik ankraj sapanı her tür profilde güvenli bir bağlantı noktası oluşturmak amacı ile tasarlanmıştır. OD-S6 çelik ankraj sapanı yenilikçi teknolojik üretimi ile Ø6mm çapında 316L kalite paslanmaz çelik malzemeden üretilmiştir. Üzeri pvc malzeme ile kaplıdır.

